




## BTB555-14-M2

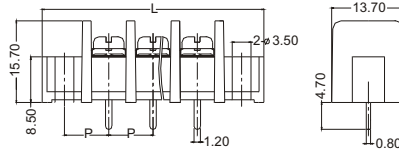

P=Pitch

L=PxPoles+2.0

### TECHNICAL DATA

PITCH	8.255mm
WIRE RANGE	26--12AWG
MAX. TORQUE	7lb-in.
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V

### MATERIALS

BODY	PBT,UL94,V-0
SCREW	M3,STEEL,NICKEL PLATED
TERMINAL BODY	BRASS,TIN PLATED

OPERATING	-40°C ~ +120°C
PCB HOLE DIAMETER	ø1.75mm

PxPoles	L	PxPoles	L
02	33.02	18	165.10
03	41.28	19	173.36
04	49.53	20	181.61
05	57.79	21	189.87
06	66.04	22	198.12
07	74.30	23	206.38
08	82.55	24	214.63
09	90.81	25	222.88
10	99.06	26	231.13
11	107.32	27	239.38
12	115.57	28	247.63
13	123.83	29	255.89
14	132.08	30	264.14
15	140.34	31	272.40
16	148.59	32	280.65
17	156.85		

## ORDERING INFORMATION

