

**BARRIER
TERMINAL BLOCK**


TYPE BTB651



SPECIFICATIONS

WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:5 lb-in.
CENTER SPACING:7.62mm / 0.300in.	PRESSURE PLATE:.....Steel, Ni Plated
WIRE RANGE:14--22 AWG	SCREW: M3, Steel, Ni Plated
ELECTRICAL RATING:300V, 15A	TERMINAL :Brass, Tin Plated
BREAKDOWN VOLTAGE:4,000V	OPERATING:-40°C to +105°C
MOLDING:Thermoplastic, UL94, V-0 Self Extinguishing	-40°F to +221°F
	MAX. SOLDERING:260°C , +500°F for 5 seconds

MECHANICAL DIMENSIONS

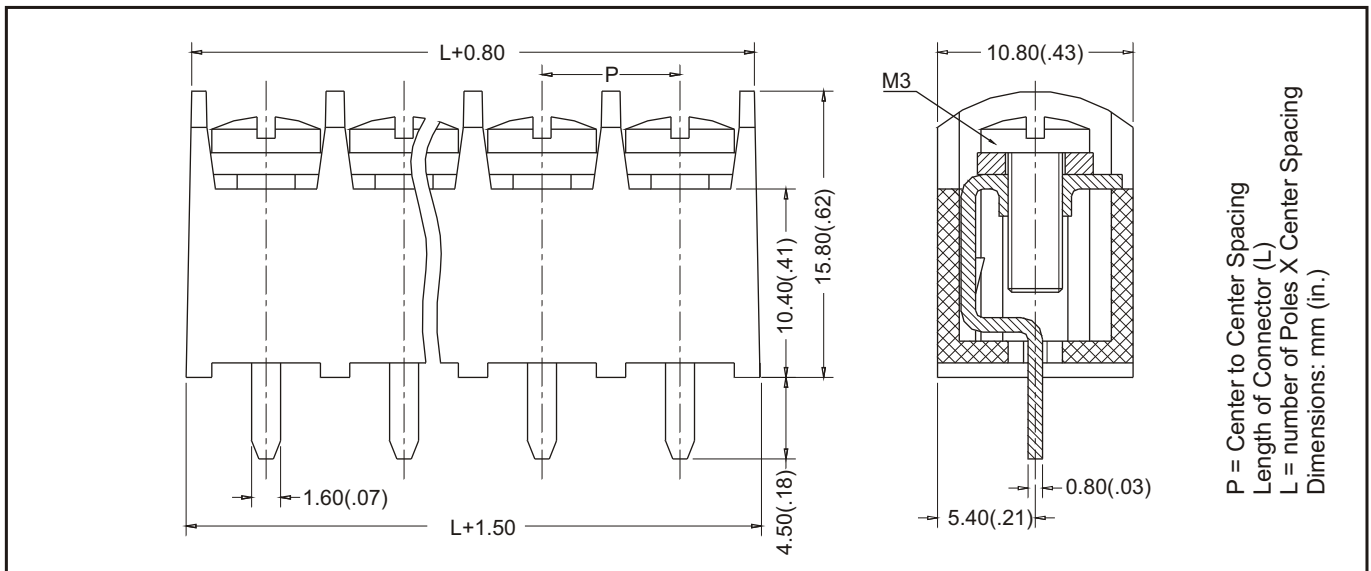

ORDERING INFORMATION

BTB651

0 0

□ □

□

M □ □

Style
00 to 99

Poles
02 to 20

Color
 0=Light Grey 1=Black
 2=Blue 3=Green
 4=Dark Grey 5=Milk White

Options*

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).