EURO
TERMINAL BLOCK

TYPE JTB552

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....5.08mm / 0.200 in.
5.00mm / 0.197 in.
WIRE RANGE: .....12--26 AWG
ELECTRICAL RATING: 300V, 15A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: .....Polyamide, UL94, V-0
Self Extinguishing
MAX. TORQUE: .....5 lb-in.

WIRE CAGE: .....Brass,Ni Plated
SCREW: .....M3,Philips Screw,Steel
Zinc Plated
TERMINAL: .....Brass,Tin Plated
TEMPERATURE:
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

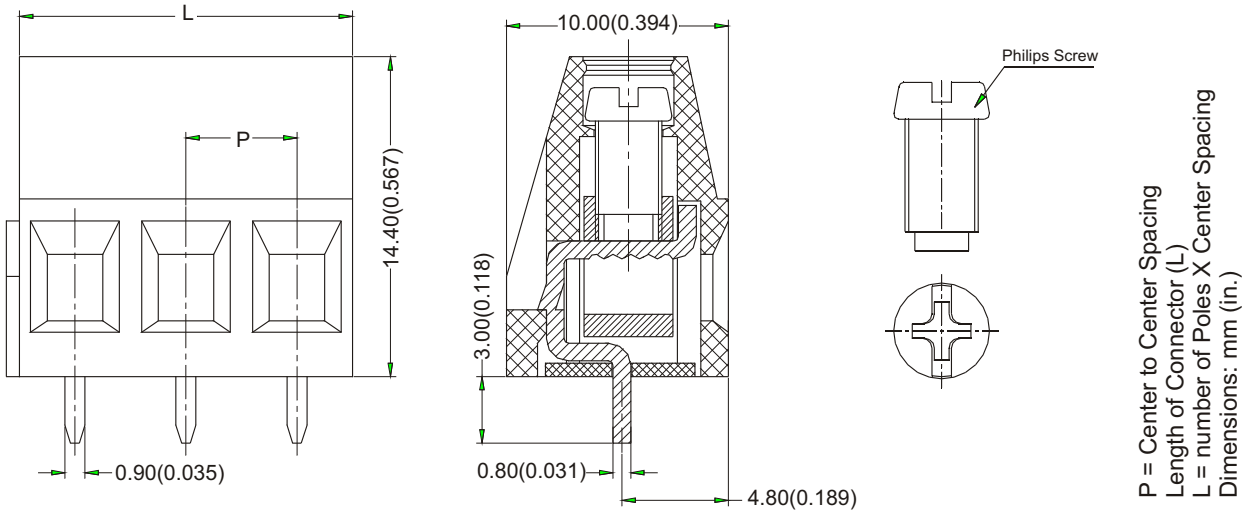

ORDERING INFORMATION

JTB552 — 0 0 — □ — □ □ — □ — M 1

Styles	Spacing	Poles	Color	
00 to 99	1=5.00mm 2=5.08mm	02 to 32	0=Light Grey 2=Blue 4=Dark Grey	1=Black 3=Green

Philips Screw*

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).