


**SPRING  
TERMINAL BLOCK**




**TYPE STB710  
SPECIFICATIONS**



<b>WIRE ENTRANCE:</b> .....45° to PCB	<b>TERMINAL:</b> .....Copper, Tin Plated
<b>CENTER SPACING:</b> .....3.50mm / 0.138 in.	<b>TEMPERATURE:</b>
<b>WIRE RANGE:</b> .....16--20 AWG	<b>OPERATING:</b> .....-40°C to +105°C
<b>ELECTRICAL RATING:</b> .....300V, 5A	.....-40°F to + 221°F
<b>BREAKDOWN VOLTAGE:</b> .....4,000V	<b>MAX. SOLDERING:</b> .....260°C , +500°F
<b>MOLDING:</b> .....Polyamide, UL94, V-0	.....for 5 seconds
<b>Self Extinguishing</b>	

**MECHANICAL DIMENSIONS**

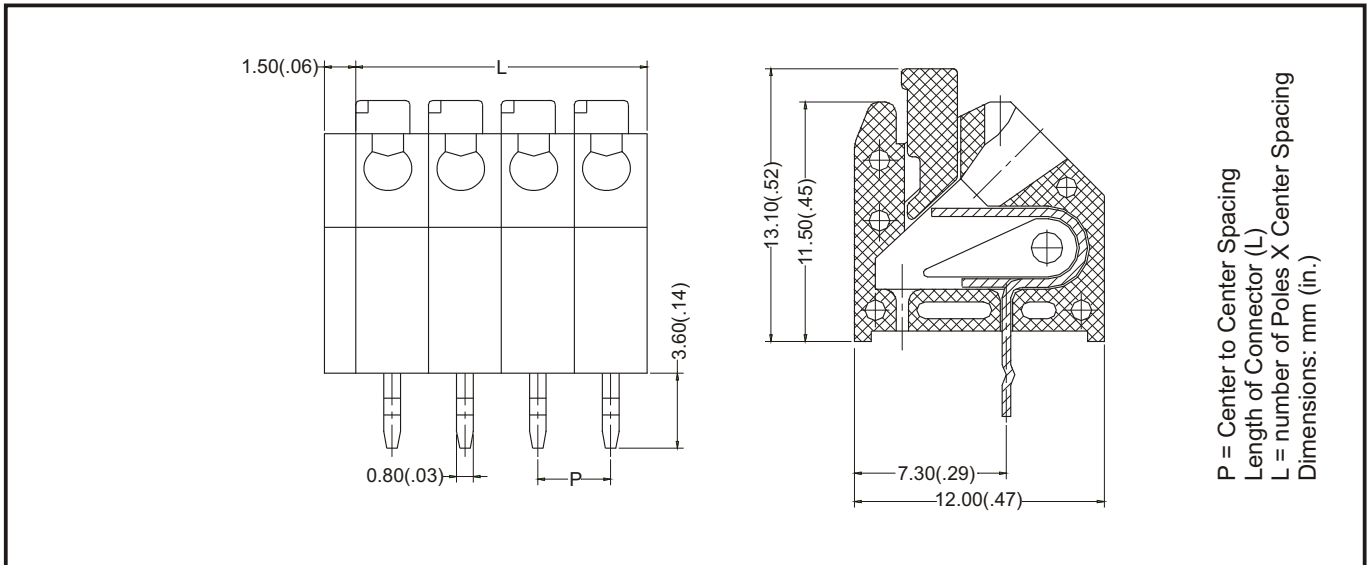

**ORDERING INFORMATION**

**STB710** — 0 2 —     —   —    

<b>Style</b> 00 to 99	<b>Poles</b> 02 to 24	<b>Color</b> 0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	<b>Options*</b>
--------------------------	--------------------------	---	-----------------

**Options\*:** M#, For Customer Modification (Please provide sketch).  
If more than one option is required, please separate each option with a dash (-).