


**EURO
TERMINAL BLOCK**




TYPE JTB552



SPECIFICATIONS

WIRE ENTRANCE:Parallel to PCB	WIRE CAGE:Brass,Ni Plated
CENTER SPACING:5.08mm / 0.200 in.	SCREW:M3,Philips Screw,Steel
5.00mm / 0.197 in.	Zinc Plated
WIRE RANGE:12--26 AWG	TERMINAL:Brass,Tin Plated
ELECTRICAL RATING:300V, 15A	TEMPERATURE:
BREAKDOWN VOLTAGE:4,000V	OPERATING:-40°C to +105°C
MOLDING:Polyamide, UL94, V-0	-40°F to + 221°F
Self Extinguishing	MAX. SOLDERING:260°C , +500°F
MAX. TORQUE:5 lb-in.	for 5 seconds

MECHANICAL DIMENSIONS

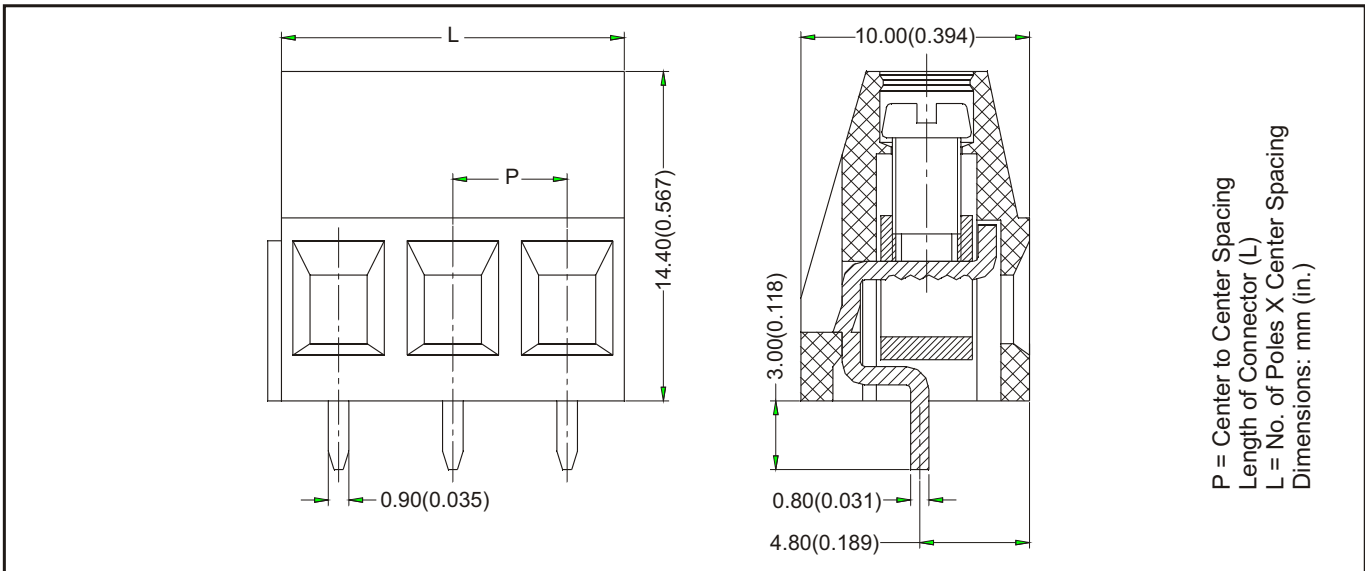

ORDERING INFORMATION

JTB552 — — — — —

Styles 00 to 99	Spacing 1=5.00mm 2=5.08mm	Poles 02 to 32	Color 0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	Options*
---------------------------	--	--------------------------	---	-----------------

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).